


Waterlogic
Purity for every environment



WL 2500



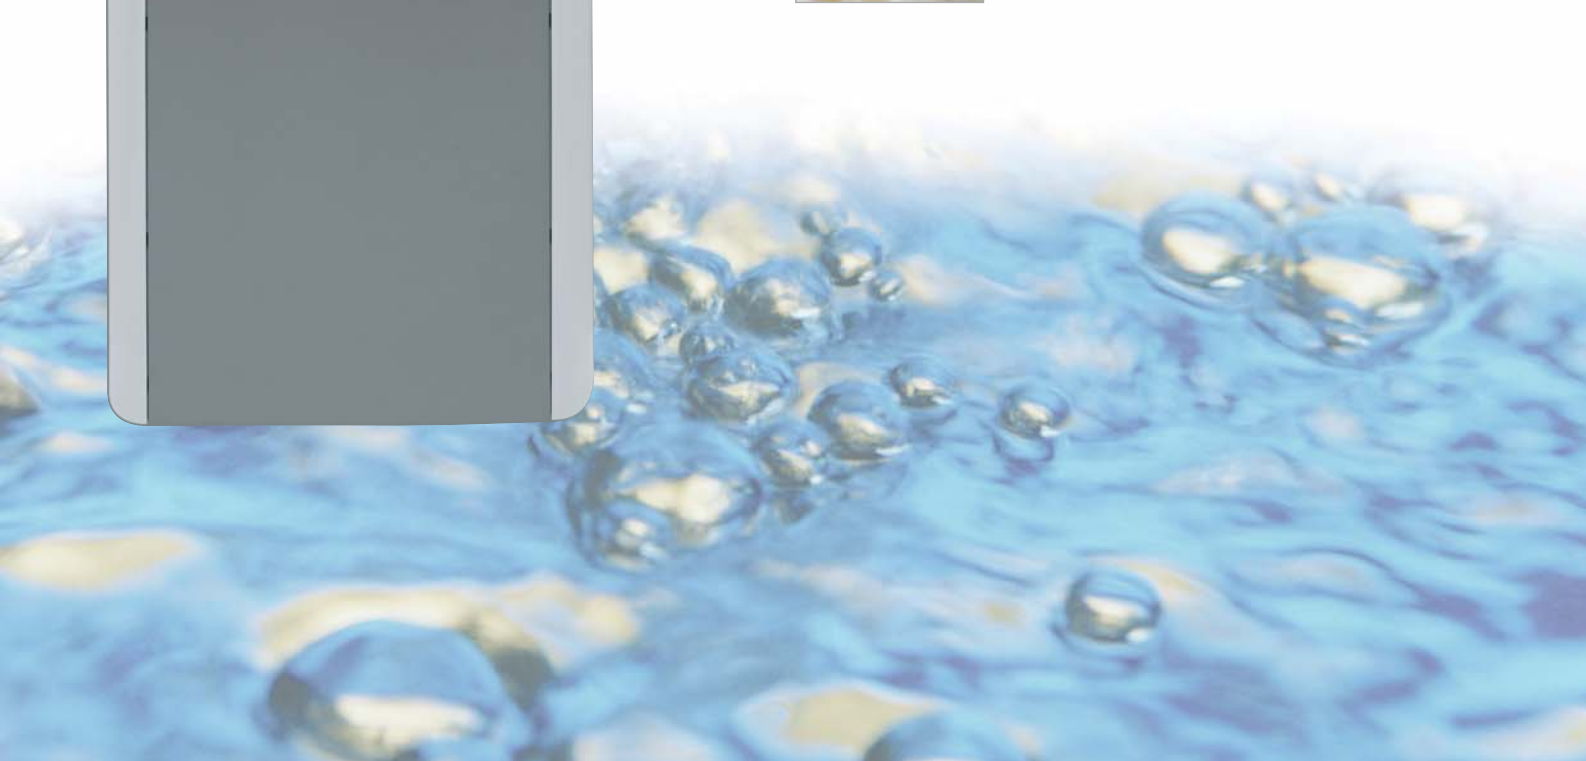

Everyone is health conscious these days. So, you want your staff, customers and visitors to have access to high quality drinking water – but you don't want any hassle. We can offer a refreshingly simple answer: **The Waterlogic 2500.**

The Waterlogic 2500 water dispenser, delivers an instant and constant supply of the highest quality drinking water. It also comes in a choice of water variants and can provide chilled and instant hot water through the same dispenser. This enables hot drinks to be made without wasting time waiting for kettles to boil.

Because the Waterlogic 2500, unlike bottled water coolers, is supplied through the mains, it does away with the problems of storage, lifting heavy water bottles, degradation and sanitisation, not to mention running out.

Instead, you get features such as ergonomic design that complements every environment, advanced filtration and ultraviolet technology to guarantee water of real purity: fresh and free from harmful bacteria. With cost savings in terms of supplies and precious time over bottled water coolers, Waterlogic makes everyone's life easier.

Features: WL 2500

- 2 stage purification process including ultraviolet technology (guarantees water within EU guidelines)
- Constant supply of chilled filtered water adjustable 3°C to 12°C
- Instant hot water adjustable up to 95°C with safety features: hot and cold models
- Extra hot facility to boost temperature: hot and cold model
- Hot water indicator light: hot and cold model
- Large drip tray



Options: WL 2500

The Waterlogic 2500 is available in the following:

Colour: White/grey

Water: Hot and cold or cold only

Size: Freestanding or table top

Machine weight

WL 2500 freestanding:	hot and cold	30kg
WL 2500 freestanding:	cold only	28kg
WL 2500 table top:	hot and cold	23kg
WL 2500 table top:	cold only	22kg

Installation requirements

To ensure that the Waterlogic machine can be installed quickly and smoothly in your proposed location, each machine will require a 13 amp (240 AC) switched socket which should not be more than one metre from the machine.

Each plumbed water machine needs to be supplied with water from a rising main. Machines cannot be connected to a storage tank water supply. The pipe work should ideally be no more than one metre from the machine although our in-house service team are able to install machines in the majority of locations. Pipe work must be terminated with a 15mm BS1010 stopcock.

